

**DS-KAD706-SP**  
**Video Intercom Two-Wire Distributor Bundle**

104-886S



**Key Feature**

- 6 cascade interfaces used for connecting with DS-KAD706 and DS-KAD706-S
- 6 interface indicators for displaying network status

**Approval**

**Video Audio Distributor**

CE-EMC	a. EN 55032:2015 b. EN 61000-3-2:2014 c. EN 61000-3-3:2013 d. EN 50130-4:2011 +A1:2014
CE-LVD	EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013
CE-RED	a. EN 201 489-1 V2.1.1, EN 301 489-17 V3.1.1 b. EN 300 328 V2.1.1, EN 62311:2008
CB	IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013
FCC-SDOC	47 CFR Part 15, Subpart B
FCC-ID	a. 47 CFR Part 15, Subpart C
C-TICK(EMC)	AS/NZS CISPR 32:2015
UL	UL 60950-1 & CAN/CSA C22.2 No. 60950-1-07, Information Technology Equipment – Safety – Part 1: General Requirements
IC (EMC)	a. ICES-003:Issue 6
ROHS	2011/65/EU
REACH	Regulation (EC) No 1907/2006
WEEE	2012/19/EU


## Specifications

Interfaces	
Network interface	1 RJ45 (1-ch reserved terminal and 1-ch for WAN access)
Two-wire interface	6-ch for data exchanging
Signal indicator	6 indicators for displaying 6-ch signals
Power indicator	1
Reset	1
General	
Power supply	Two-wire mode, 24 VDC
Power consumption	< 7 W
Working temperature	-10 °C to +40 °C (14 °F to +104 °F)
Working humidity	10% to 90%
Dimension	143.7mm × 92.4mm × 65.9mm (5.66" × 3.64" × 2.59")

## Weight


0.8942 Kg

## Typical Application

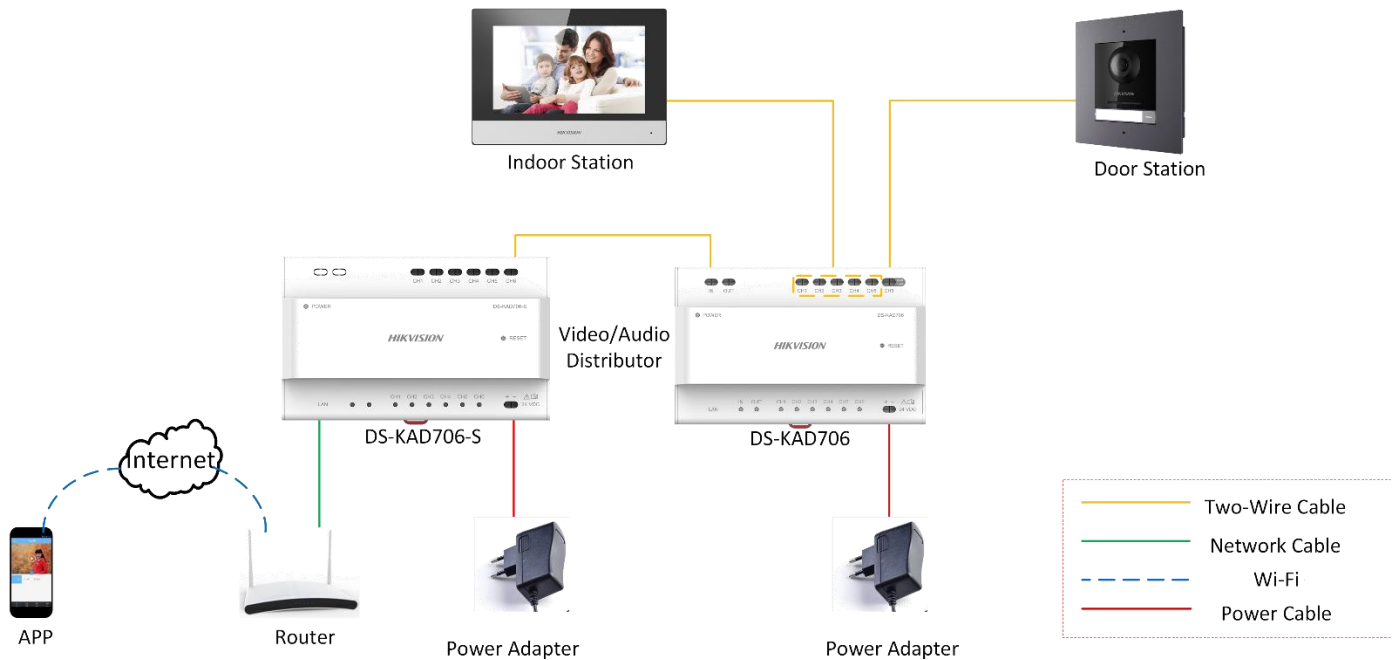

## Appearance and Interfaces

### Video Audio Distributor

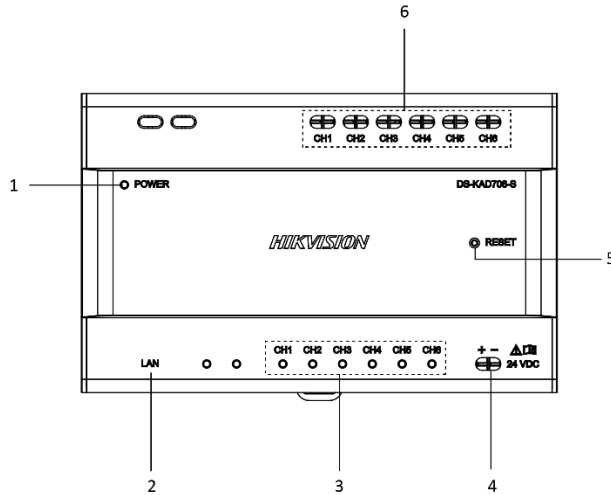

No.	Description	No.	Description
1	Power Indicator	4	Power Input
2	Network Interface	5	Reset Button
3	Network Indicator	6	Interface

### ORDERING INFORMATION

104-886S

Hikvision DS-KAD706-S



Innovative Electronic Solutions  
www.ness.com.au



**NSW** Ph 02 8825 9222  
sales@ness.com.au

**VIC** Ph 03 9875 6400  
nessmelb@ness.com.au

**QLD** Ph 07 3399 4910  
nessbris@ness.com.au

**WA** Ph 08 9328 2511  
nessper@ness.com.au

**SA** Ph 08 8152 0000  
adelaide@ness.com.au