

DS-KH8301-WT
Indoor Video Intercom Station with 7-inch Touch Screen

104-829

- 7-inch FTF Color LCD with 1024 x 600 Resolution
- Capacitive Touch Screen
- 8-ch Alarm Input Sensors
- Uploads Alarms to Master Station, Client, or App
- Noise Suppression and Echo Cancellation
- Monitors Door Stations and External Cameras
- Remote Door Unlocking via Client or App
- High-Performance SOC Processor
- MicroSD Card Support

The Hikvision DS-KH8301-WT Video Intercom Indoor Station offers hands-free audio-visual communication between the door station and the master station.


The DS-KH8301-WT features a robust message notification function, including written and voice messages, and automatically uploads alarm messages to the master station or the client software.



The DS-KH8301-WT also provides two-way talk between the door station, master station, and management center. Also, the system can remotely unlock the door.


DS-KH8301-WT couples HD video surveillance with high performance CMOS technology in a 0.3 MP resolution camera. Mounting can be to a standard U.S. single or double gang box for easy installation.

Typical Application

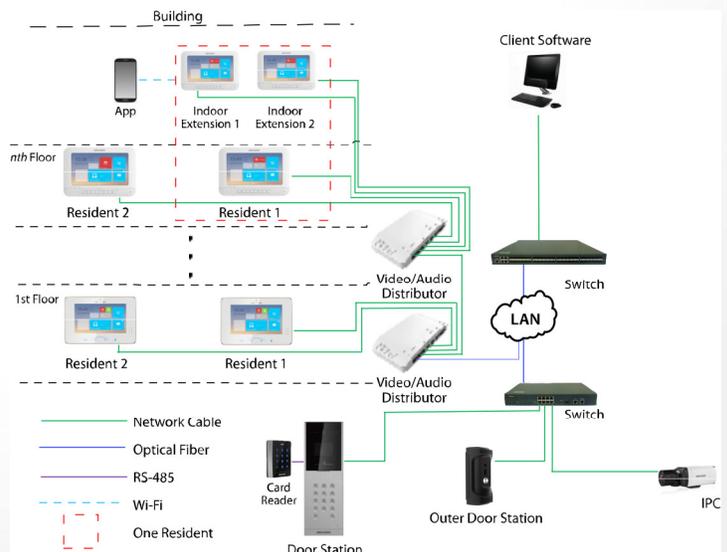

DS-KH8301-WT	
System	
Processor	High-performance embedded SOC processor
Operating System	Embedded Linux operating system
Video	
Camera	CMOS 0.3 MP, mechanical switch
Video Compression Standard	H.264
Resolution	1024 x 600
Video Frame Rate	PAL: 25 fps, NTSC: 30 fps
Display	
Display Screen	7-Inch colorful TFT LCD
Display Resolution	1024 × 600
Operation Method	Capacitive touch screen, touch key
Operation Interface	Flattened UI operation interface
Audio	
Audio Input	Built-in omni-directional microphone
Audio Output	Built-in loudspeaker
Audio Compression Standard	G.711 U
Audio Compression Rate	64 Kbps
Audio Quality	Noise suppression and echo cancellation
Network	
Ethernet	10/100 Mbps self-adaptive Ethernet
Network Protocol	TCP/IP, RTSP
Alarm	
Alarm Input	8-ch alarm input sensor
Device Interfaces	
Network Interface	1 RJ-45 10/100 Mbps self-adaptive Ethernet interface
RS-485	1 RS-485 half-duplex port
I/O Output	2
MicroSD Card	Supports maximum 32 GB
General	
Memory	256 MB
Power Supply	24 VDC, power over network cable (DS-KAD606-P) 12 VDC
Power Consumption	≤ 10 W
Working Temperature	14° to 131° F (-10° to + 55° C)
Working Humidity	10% to 90%
Dimensions (L × W × H)	8.5" × 5.6" × 1.0" (217 mm × 142 mm × 26 mm)
Certifications	CE, FCC, UL 60950-1, IC, C-TICK, ROHS, REACH, WEEE

Landmarks and Dimensions

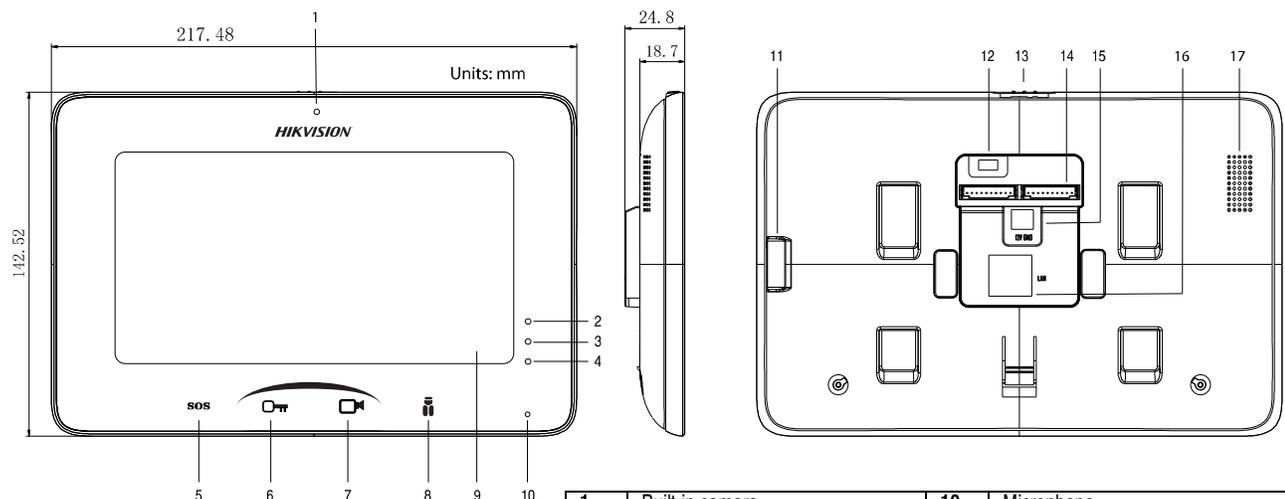

Mounting: Standard U.S. single or double gang box

1	Built-in camera	10	Microphone
2	Power supply indicator	11	MicroSD card slot
3	Information indicator	12	Serial port
4	Alarm indicator	13	Mechanical switch
5	SOS touch key	14	Terminals
6	Unlock touch key	15	Power supply interface
7	Live View touch key	16	Network interface
8	Management center touch key	17	Loudspeaker
9	LCD screen		



ORDERING INFORMATION

104-829 Hikvision DS-KH8301-WT Video Intercom Room Station (WiFi)



Innovative Electronic Solutions
www.ness.com.au



NSW Ph 02 8825 9222 sales@ness.com.au	VIC Ph 03 9875 6400 nessmelb@ness.com.au	QLD Ph 07 3399 4910 nessbris@ness.com.au	WA Ph 08 9328 2511 nessper@ness.com.au	SA Ph 08 8152 0000 adelaide@ness.com.au
---	--	--	--	---