

Wall mount bracket for white IP PTZ cameras

DWC-P336WMW



WHAT'S IN THE BOX	
4x plastic anchors (8pi)	4x nuts (M8)
4x hex tapping screws (8x50)	4x spring washers (M8)
1x hex Allen wrench (2.5)	1x quick setup guide
1x PT plug tool	

NOTE: Download all your support materials and tools in one place

- 1. Go to: http://www.digital-watchdog.com/resources
- 2. Search your product by entering the part number in the **'Search by Product'** search bar. Results for applicable part numbers will populate automatically based on the part number you enter.
- 3. Click **'Search'**. All supported materials, including manuals and quick start guide (QSGs) will appear in the results.








Quick Start Guide

INSTALLING THE MOUNTING ACCESSORY

- 1. Using the wall mount, mark and drill the mounting holes on the surface using the wall mount flange.
- 2. Pull wires through to connect to the PTZ camera from the ceiling.
- 3. Using the plastic anchors and screws*, mount and secure the wall mount bracket to the mounting surface.
- Open the access plate and pull out cables through the rectangular access hole.
- Attach the 1.5 -inch adapter to the ceiling mount bracket and fix it using the set screw.
- Attach the camera's safety wire to the ceiling mount bracket and organize cables.
- 7. Close the access plate of the mounting bracket.
- 8. Push in and turn the camera clockwise into the adapter. Fix it using the set screw of the adapter.





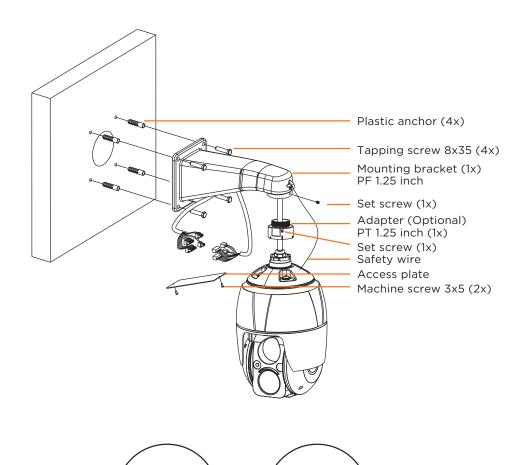

Twist

Start point

(Long indicator)

Set point

(Short indicator)